

SERIE AV

STANDARD CITO

FLEXQ

CONNECTORS



AV



Inlet

3/4"
1"
1 1/4"
1 1/2"
2"



Number of outlets

2 - 8



Pressure

0 - 30 bar



Temperature range

-20°C +200°C

Includes end caps, mounting screws are not included

The anodized aluminum is not suitable for corrosive liquids (high chlorine content)

OPTIONS

Colours and design according to customer requirements
Anodized

APPLICATIONS

Injection moulding
Die casting



With separator divided in the middle

Option R/B

ITEM CODE

AV T1 I - T2 O - S - N - C

AV Aluminium Collector

T1 Thread type inlet

I Thread Inlet

T2 Thread type outlet

O Thread outlet

S Scheme

N Number exits

C Colour

Thread type

T1/ T2	Thread type
G	BSP
N	NPT


Inlet

I	Thread size
34	3/4"
10	1"
114	1 1/4"
112	1 1/2"
20	2"

Outlets

O	Thread size
14	1/4"
38	3/8"
12	1/2"
34	3/4"

Scheme

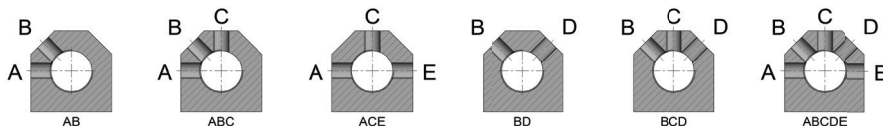


Colour

C	Colour
R	Red
B	Blue
R/B	Red-Blue
N	Anodized

EXAMPLE CODE

AV G10-G14-BCD-6 -R

DIMENSIONS

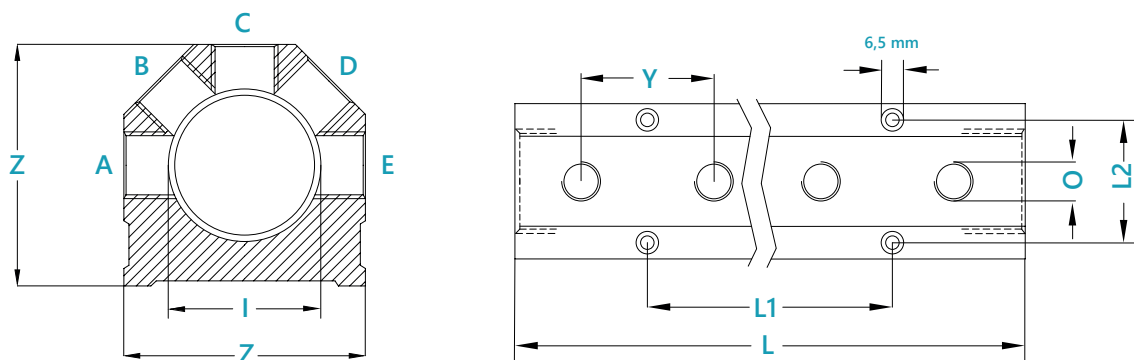

I Inlet	O Outlet	N Outlets on one side	L Length	L1 Distance between mounting holes	L2 Distance between mounting holes	Y Distance between exits	Z Height
3/4"	1/4" 3/8" A AC ACE BD	2 4 6 8	70 120 172 222	0 50,8 101,6 152,4	35	25,4	44,5
1"	1/4" 3/8" A AC ACE BD	2 4 6 8	95 159 222 286	0 63,5 127 190,5	38,1	31,75	50,8
1 1/4"	1/4" 3/8" 1/2"	2 4 6 8	152 254 355 457	0 101,6 203,2 304,8	47,6	50,8	63,5
1 1/2"	1/4" 3/8" 1/2"	2 4 6 8	152 254 355 457	0 101,6 203,2 304,8	57,2	50,8	76,2
2"	3/8" 1/2" 3/4"	2 4 6 8	203 305 432 559	0 127 254 381	72,4	63,50	89,0

FLEXQ

