


SERIE **AVS**

STACKABLE ALUMINIUM COLLECTORS

FLEXQ
CONNECTORS

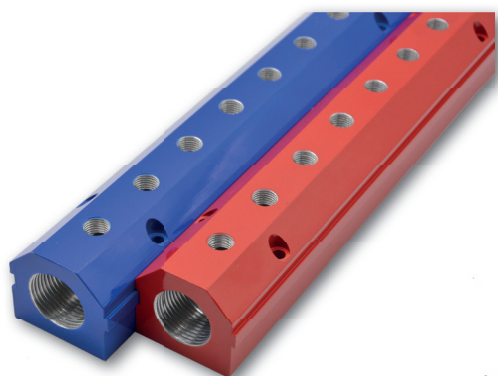

AVS	
 Inlet	n Number of outlets
3/4" 1"	4 - 16
 Pressure	 Temperature range
0 - 30 bar	-20°C +200°C


End caps and mounting screws are not included

OPTIONS

Colours and design according to customer requirements

APPLICATIONS

Injection moulding
Die casting

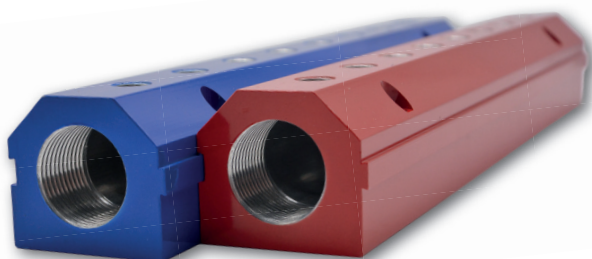

ITEM CODE

AVS T1 I - T2 O - N - C - L

AVS Aluminium Collector

T1 Thread type inlet

I Thread Inlet

T2 Thread type outlet

O Thread outlet

N Number exits

C Colour

L Total length

Thread type

T1/T2	Thread type
G	BSP
N	NPT

Inlet

I	Thread size
34	3/4"
10	1"

Outless

O	Thread size
14	1/4"
38	3/8"
12	1/2"



Colour

C	Colour
R	Red
B	Blue

EXAMPLE CODE

AVS G10-G38-8-R-433

DIMENSIONS

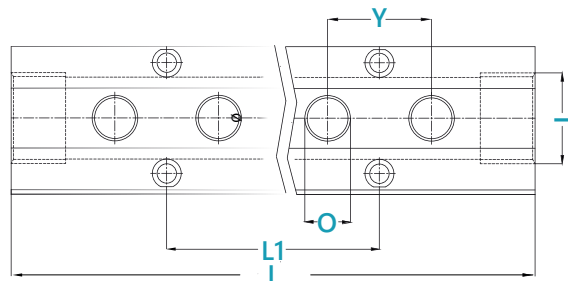

I Inlet	O Outlet	ITEM CODE	N outlets	L Length	L1 Distance between mounting holes	L2 Distance between mounting holes	L3	Y Distance between exits	Z Height
3/4"	1/4"	AVS.G34.G14.4.190 AVS.G34.G14.6.266 AVS.G34.G14.8.342 AVS.G34.G14.10.418	4 6 8 10	190 266 342 418	76 152 228 304	31	45	38	41,5
	3/8"	AVS.G34.G38.4.229 AVS.G34.G38.6.331 AVS.G34.G38.8.433 AVS.G34.G38.10.535	4 6 8 10	229 331 433 535	102 204 306 408			51	
1"	1/4"	AVS.G10.G14.4.190 AVS.G10.G14.6.266 AVS.G10.G14.8.342 AVS.G10.G14.10.418 AVS.G10.G14.12.494 AVS.G10.G14.14.570 AVS.G10.G14.16.646	4 6 8 10 12 14 16	190 266 342 418 494 570 646	76 152 228 304 380 456 532	40,6	53	38	48,5
	3/8"	AVS.G10.G38.4.229 AVS.G10.G38.6.331 AVS.G10.G38.8.433 AVS.G10.G38.10.535 AVS.G10.G38.12.637 AVS.G10.G38.14.739 AVS.G10.G38.16.841	4 6 8 10 12 14 16	229 331 433 535 637 739 841	102 204 306 408 510 612 714			51	
	1/2"	AVS.G10.G12.4.229 AVS.G10.G12.6.331 AVS.G10.G12.8.433 AVS.G10.G12.10.535 AVS.G10.G12.12.637 AVS.G10.G12.14.739 AVS.G10.G12.16.841	4 6 8 10 12 14 16						

FLEXQ

■ ALUMINIUM COLLECTORS / SERIES AVS

