

FLEXQ
CONNECTORS

HHT
Full Flow



LINKING PRECISION WITH PERFORMANCE

HHT, the international standard quick coupling system for low pressure applications and all media

Characteristics

- Optimized flow characteristics
- Ergonomic and compact design
- Wide flow size range
- Available in stainless-steel
- International profile

Safe and quick locking

The stainless-steel balls provide a reliable locking. The locking sleeve is ergonomically designed - thanks to this properties HHT series becomes a comfortable and safe quick connect/disconnect coupling system.

HHT
COOLING STANDARD



SERIE HHT

FULL FLOW

PROFILE INTERNATIONAL

Options

- Colour coding
- Stainless steel
- Steel
- Safety locking

R / B
VA
ST
S

Applications

- Cooling and heating
- Injection and blow moulding
- Testing units

	Brass version		Steel version
Body Socket	Brass	Body Socket	Steel zinc plated
Body Plug	Brass	Body Plug	Steel zinc plated
Sleeve	Brass	Sleeve	Steel zinc plated
Locking Ring	Stainless steel	Locking Ring	Stainless steel
Spring	Stainless steel	Spring	Stainless steel
Balls	Stainless steel	Balls	Stainless steel
Seals	Nitril (NBR)	Seals	Nitril (NBR)

	Stainless steel version
Body Socket	Stainless steel
Body Plug	Stainless steel
Sleeve	Stainless steel
Locking Ring	Stainless steel
Spring	Stainless steel
Balls	Stainless steel
Seals	Nitril (NBR)



Temperature range

Nitril (NBR)	N	- 15 °C +100 °C
Fluorcarbon (FPM)	V	- 20 °C +160 °C (Water) -20 °C +200 °C (Heating Oil)



Flow Size

HHT 04 HHT 06 HHT 10 HHT 13 HHT 19 HHT 25 HHT 32 HHT 38

4 6 10 13 19 25 32 38



Pressure


Check the table at page 31




Always make sure no medium flows before disconnecting

FLEXQ


Series HHT - Flow Rate & Pressure Drop Graph

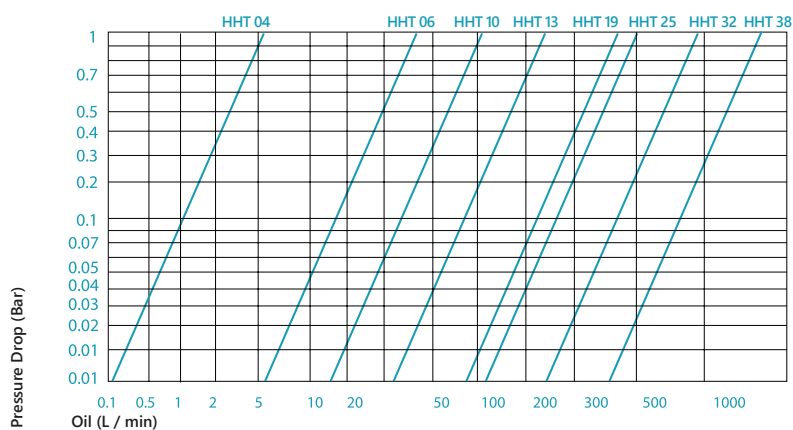


Size				Ød	Ød1	L	HEX
	Brass	Steel	Stainless Steel				
4	HHT 04 FFF 18	HHT 04 FFF 18 ST	HHT 04 FFF 18 VA	BSP 1/8	16	25	14
	HHT 04 FNF 18	HHT 04 FNF 18 ST	HHT 04 FNF 18 VA	NPT 1/8	16	25	14
6	HHT 06 FFF 14	HHT 06 FFF 14 ST	HHT 06 FFF 14 VA	BSP 1/4	24	37	21
	HHT 06 FNF 14	HHT 06 FNF 14 ST	HHT 06 FNF 14 VA	NPT 1/4	24	37	21
10	HHT 10 FFF 38	HHT 10 FFF 38 ST	HHT 10 FFF 38 VA	BSP 3/8	28	40	24
	HHT 10 FNF 38	HHT 10 FNF 38 ST	HHT 10 FNF 38 VA	NPT 3/8	28	40	24
13	HHT 13 FFF 12	HHT 13 FFF 12 ST	HHT 13 FFF 12 VA	BSP 1/2	32	50	27
	HHT 13 FNF 12	HHT 13 FNF 12 ST	HHT 13 FNF 12 VA	NPT 1/2	32	50	27
19	HHT 19 FFF 34	HHT 19 FFF 34 ST	HHT 19 FFF 34 VA	BSP 3/4	41	54	36
	HHT 19 FNF 34	HHT 19 FNF 34 ST	HHT 19 FNF 34 VA	NPT 3/4	41	54	36
25	HHT 25 FFF 10	HHT 25 FFF 10 ST	HHT 25 FFF 10 VA	BSP 1	50	60	41
	HHT 25 FNF 10	HHT 25 FNF 10 ST	HHT 25 FNF 10 VA	NPT 1	50	60	41
32	HHT 32 FFF 114	HHT 32 FFF 114 ST	HHT 32 FFF 114 VA	BSP 1 1/4	60	62	50
	HHT 32 FNF 114	HHT 32 FNF 114 ST	HHT 32 FNF 114 VA	NPT 1 1/4	60	62	50
38	HHT 38 FFF 112	HHT 38 FFF 112 ST	HHT 38 FFF 112 VA	BSP 1 1/2	79	74	65
	HHT 38 FNF 112	HHT 38 FNF 112 ST	HHT 38 FNF 112 VA	NPT 1 1/2	79	74	65




Size				Ød	Ød1	L	L1	HEX
	Brass	Steel	Stainless Steel					
4	HHT 04 FRF 18	HHT 04 FRF 18 ST	HHT 04 FRF 18 VA	BSPT 1/8	16	26	9	14
	HHT 04 FTF 18	HHT 04 FTF 18 ST	HHT 04 FTF 18 VA	NPT 1/8	16	26	9	14
6	HHT 06 FRF 14	HHT 06 FRF 14 ST	HHT 06 FRF 14 VA	BSPT 1/4	24	40	12	21
	HHT 06 FTF 14	HHT 06 FTF 14 ST	HHT 06 FTF 14 VA	NPT 1/4	24	40	12	21
10	HHT 10 FRF 38	HHT 10 FRF 38 ST	HHT 10 FRF 38 VA	BSPT 3/8	28	43	12	24
	HHT 10 FTF 38	HHT 10 FTF 38 ST	HHT 10 FTF 38 VA	NPT 3/8	28	43	12	24
13	HHT 13 FRF 12	HHT 13 FRF 12 ST	HHT 13 FRF 12 VA	BSPT 1/2	32	51	17	27
	HHT 13 FTF 12	HHT 13 FTF 12 ST	HHT 13 FTF 12 VA	NPT 1/2	32	51	17	27
19	HHT 19 FRF 34	HHT 19 FRF 34 ST	HHT 19 FRF 34 VA	BSPT 3/4	41	57	19	36
	HHT 19 FTF 34	HHT 19 FTF 34 ST	HHT 19 FTF 34 VA	NPT 3/4	41	57	19	36
25	HHT 25 FRF 10	HHT 25 FRF 10 ST	HHT 25 FRF 10 VA	BSPT 1	50	66	23	41
	HHT 25 FTF 10	HHT 25 FTF 10 ST	HHT 25 FTF 10 VA	NPT 1	50	66	23	41
32	HHT 32 FRF 114	HHT 32 FRF 114 ST	HHT 32 FRF 114 VA	BSPT 1 1/4	60	78	24	50
	HHT 32 FTF 114	HHT 32 FTF 114 ST	HHT 32 FTF 114 VA	NPT 1 1/4	60	78	24	50
38	HHT 38 FRF 112	HHT 38 FRF 112 ST	HHT 38 FRF 112 VA	BSPT 1 1/2	79	80	25	65
	HHT 38 FTF 112	HHT 38 FTF 112 ST	HHT 38 FTF 112 VA	NPT 1 1/2	79	80	25	65



Female thread plug		 Size				Ød	Ød1	L	HEX
			Brass	Steel	Stainless steel				
	4	HHT 04 MFF 18	HHT 04 MFF 18 ST	HHT 04 MFF 18 VA	BSP 1/8	8	24	14	
		HHT 04 MNF 18	HHT 04 MNF 18 ST	HHT 04 MNF 18 VA	NPT 1/8	8	24	14	
	6	HHT 06 MFF 14	HHT 06 MFF 14 ST	HHT 06 MFF 14 VA	BSP 1/4	12	36	17	
		HHT 06 MNF 14	HHT 06 MNF 14 ST	HHT 06 MNF 14 VA	NPT 1/4	12	36	17	
	10	HHT 10 MFF 38	HHT 10 MFF 38 ST	HHT 10 MFF 38 VA	BSP 3/8	15	42	22	
		HHT 10 MNF 38	HHT 10 MNF 38 ST	HHT 10 MNF 38 VA	NPT 3/8	15	42	22	
	13	HHT 13 MFF 12	HHT 13 MFF 12 ST	HHT 13 MFF 12 VA	BSP 1/2	18	48	24	
		HHT 13 MNF 12	HHT 13 MNF 12 ST	HHT 13 MNF 12 VA	NPT 1/2	18	48	24	
	19	HHT 19 MFF 34	HHT 19 MFF 34 ST	HHT 19 MFF 34 VA	BSP 3/4	25	49	30	
		HHT 19 MNF 34	HHT 19 MNF 34 ST	HHT 19 MNF 34 VA	NPT 3/4	25	49	30	
	25	HHT 25 MFF 10	HHT 25 MFF 10 ST	HHT 25 MFF 10 VA	BSP 1	33	60	38	
		HHT 25 MNF 10	HHT 25 MNF 10 ST	HHT 25 MNF 10 VA	NPT 1	33	60	38	
	32	HHT 32 MFF 114	HHT 32 MFF 114 ST	HHT 32 MFF 114 VA	BSP 1 1/4	42	61	50	
		HHT 32 MNF 114	HHT 32 MNF 114 ST	HHT 32 MNF 114 VA	NPT 1 1/4	42	61	50	
	38	HHT 38 MFF 112	HHT 38 MFF 112 ST	HHT 38 MFF 112 VA	BSP 1 1/2	52	72	55	
		HHT 38 MNF 112	HHT 38 MNF 112 ST	HHT 38 MNF 112 VA	NPT 1 1/2	52	72	55	

Male thread plug



Size				Ød	Ød1	L	L1	HEX
	Brass	Steel	Stainless Steel					
4	HHT 04 MRF 18	HHT 04 MRF 18 ST	HHT 04 MRF 18 VA	BSPT 1/8	8	28	9	12
	HHT 04 MTF 18	HHT 04 MTF 18 ST	HHT 04 MTF 18 VA	NPT 1/8	8	28	9	12
6	HHT 06 MRF 14	HHT 06 MRF 14 ST	HHT 06 MRF 14 VA	BSPT 1/4	12	38	11	14
	HHT 06 MTF 14	HHT 06 MTF 14 ST	HHT 06 MTF 14 VA	NPT 1/4	12	38	11	14
10	HHT 10 MRF 38	HHT 10 MRF 38 ST	HHT 10 MRF 38 VA	BSPT 3/8	15	42	12	17
	HHT 10 MTF 38	HHT 10 MTF 38 ST	HHT 10 MTF 38 VA	NPT 3/8	15	42	12	17
13	HHT 13 MRF 12	HHT 13 MRF 12 ST	HHT 13 MRF 12 VA	BSPT 1/2	18	49	17	22
	HHT 13 MTF 12	HHT 13 MTF 12 ST	HHT 13 MTF 12 VA	NPT 1/2	18	49	17	22
19	HHT 19 MRF 34	HHT 19 MRF 34 ST	HHT 19 MRF 34 VA	BSPT 3/4	25	56	19	27
	HHT 19 MTF 34	HHT 19 MTF 34 ST	HHT 19 MTF 34 VA	NPT 3/4	25	56	19	27
25	HHT 25 MRF 10	HHT 25 MRF 10 ST	HHT 25 MRF 10 VA	BSPT 1	33	63	22	35
	HHT 25 MTF 10	HHT 25 MTF 10 ST	HHT 25 MTF 10 VA	NPT 1	33	63	22	35
32	HHT 32 MRF 114	HHT 32 MRF 114 ST	HHT 32 MRF 114 VA	BSPT 1 1/4	42	69	24	45
	HHT 32 MTF 114	HHT 32 MTF 114 ST	HHT 32 MTF 114 VA	NPT 1 1/4	42	69	24	45
38	HHT 38 MRF 112	HHT 38 MRF 112 ST	HHT 38 MRF 112 VA	BSPT 1 1/2	52	84	25	55
	HHT 38 MTF 112	HHT 38 MTF 112 ST	HHT 38 MTF 112 VA	NPT 1 1/2	52	84	25	55

Technical Specifications			Working Pressure		
Size			Brass	Steel	Stainless steel (VA) AISI 303
			Bar	Bar	Bar
 HHT 04	BSP 1/8		170	170	285
 HHT 06	BSP 1/4		300	310	460
 HHT 10	BSP 3/8		170	190	380
 HHT 13	BSP 1/2		170	190	200
 HHT 19	BSP 3/4		125	190	200
 HHT 25	BSP 1		75	150	125
 HHT 32	BSP 1-1/4		125	125	135
 HHT 38	BSP 1-1/2		100	115	120