


Collectors for fluids and pneumatics







Collectors

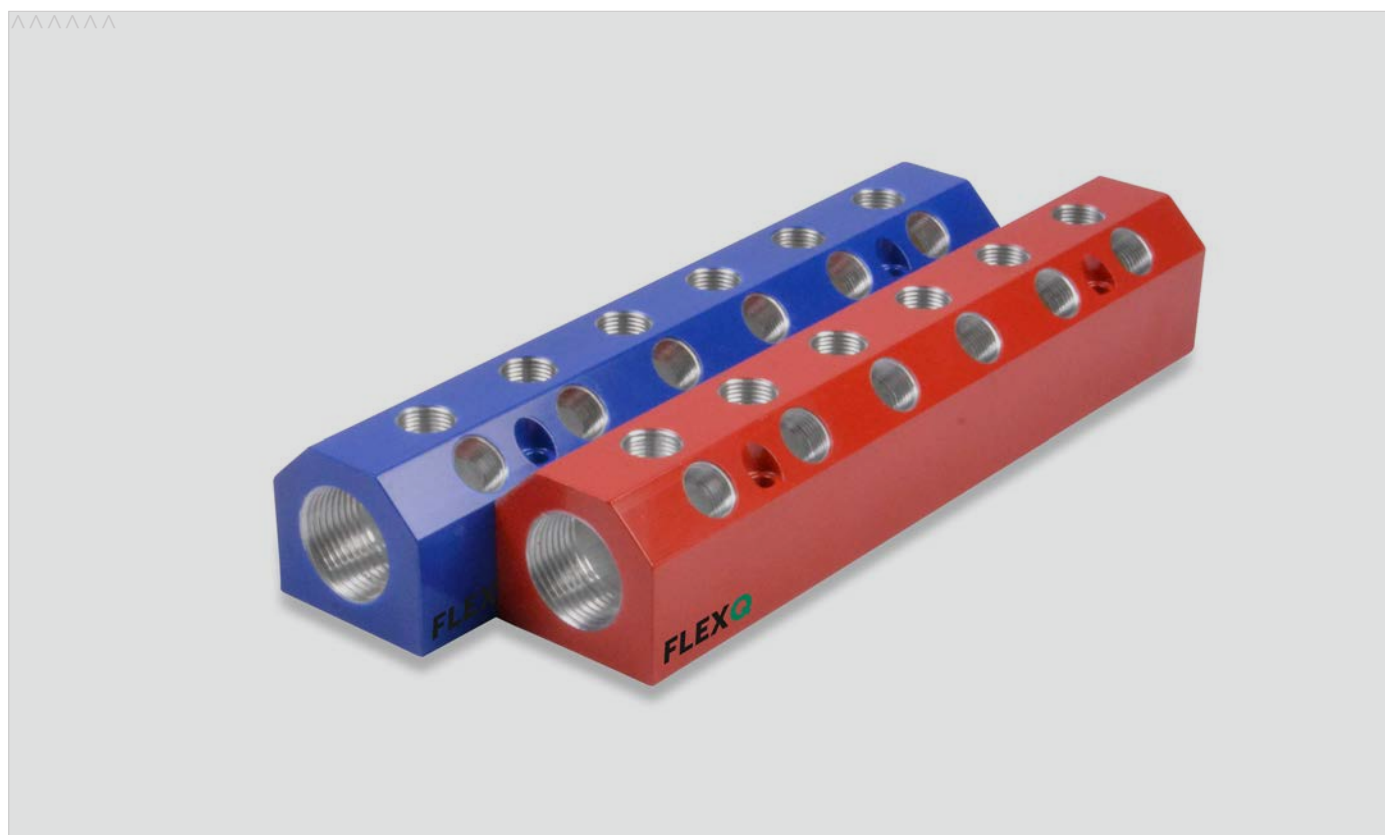

LINKING PRECISION WITH PERFORMANCE

Examples / Beispiele

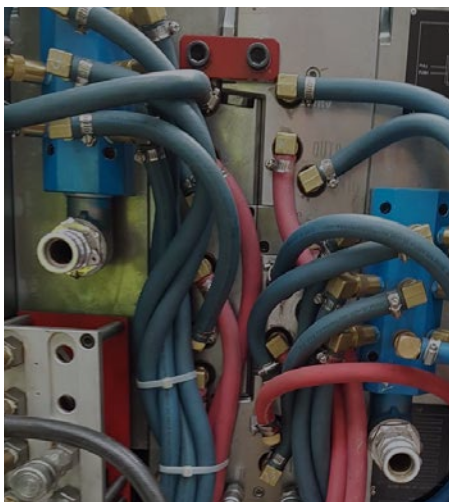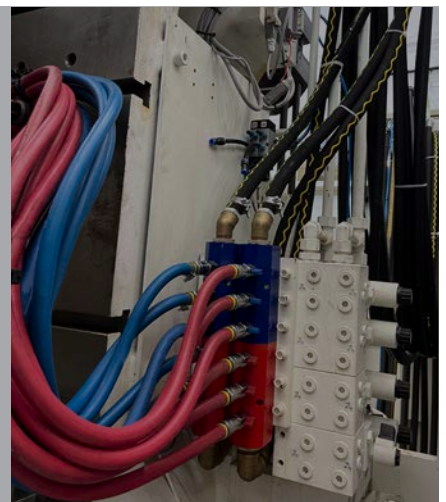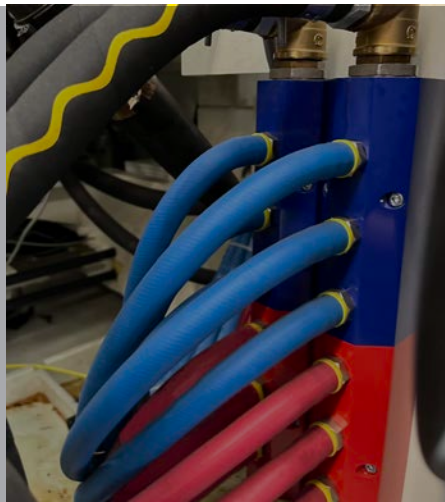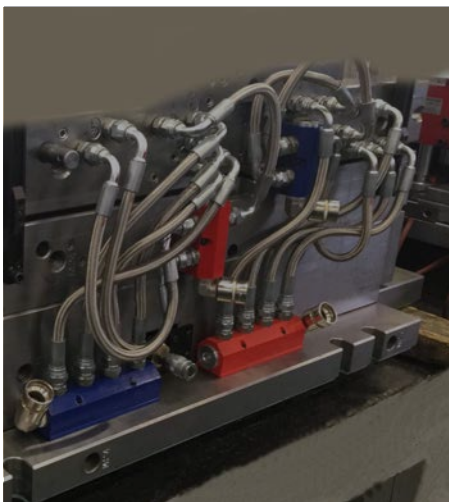

SERIES AV

STANDARD CITO

FLEXQ

CONNECTORS



AV



Inlet / Einlass

3/4"
1"
1 1/4"
1 1/2"
2"



Number of exits / Menge der Auslässe

2 - 8



Pressure / Druck

0 - 30 bar



Temperature range / Temperaturbereich

-50°C +200°C

Includes end caps, mounting screws are not included - Inklusive Endstopfen, Montageschrauben sind nicht enthalten

The anodized aluminum is not suitable for corrosive liquids (high chlorine content)
Das eloxierte Aluminium ist für korrosive Flüssigkeiten (hoher Chlorgehalt) nicht geeignet

OPTIONS / OPTIONEN

Colors and design according to customer requirements
Anodized

Farben und Auslegung nach Kundenwunsch
Eloxiert

USING AREAS / EINSATZBEREICHE

Injection moulding
Die casting

Kunststoffspritzguss
Alu Druckguss



With separator divided in the middle
Mit Trennsteg in der Mitte

Option R/B

ITEM CODE / ARTIKELNUMMER

AV T1 I - T2 O - S - N - C

AV Aluminium Collector / Alu Verteiler

T1 Thread type inlet / Gewindetyp Einlass

I Thread Inlet / Einlassgewinde

T2 Thread type outlet / Gewindetyp Auslass

O Thread outlet / Auslassgewinde

S Scheme / Schema

N Number exits /Anzahl Ausgänge

C Color / Farbe

Thread type Gewindetyp

T1/ T2	Thread type Gewindetyp
G	BSP
N	NPT


Inlet Einlass

I	Thread size Gewindegröße
34	3/4"
10	1"
114	1 1/4"
112	1 1/2"
20	2"

Outlet Auslass

O	Thread size Gewindegröße
14	1/4"
38	3/8"
12	1/2"
34	3/4"

Scheme Schema

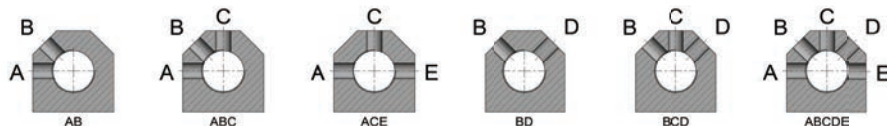


Color Farbe

C	Color Farbe
R	Red / Rot
B	Blue / Blau
R/B	Red-Blue/ Rot-Blau
N	Anorized / Eloxiert

EXAMPLE CODE / BEISPIEL ARTIKELNUMMER

AV G10-G14-BCD-6 -R

DIMENSIONS / ABMESSUNGEN

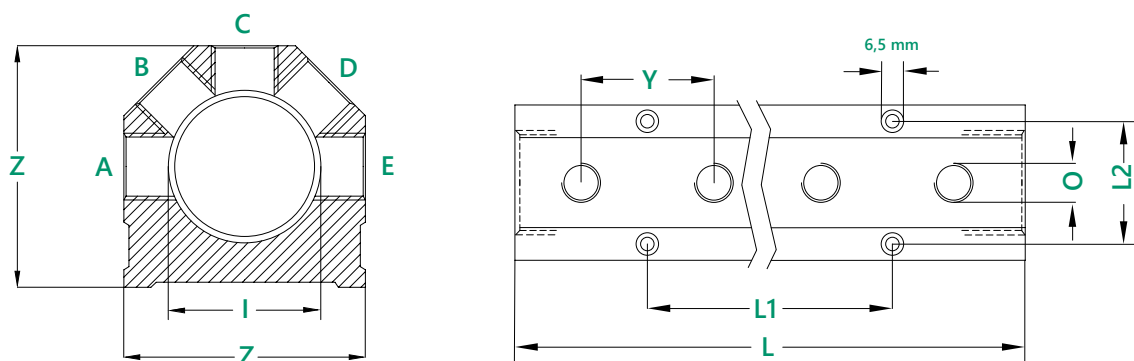

I INLET	O OUTLET	N EXITS ON ONE SURFACE	L LENGTH	L1 DISTANCE BETWEEN MOUNTING HOLES	L2 DISTANCE BETWEEN MOUNTING HOLES	Y DISTANCE BETWEEN EXITS	Z HEIGHT
3/4"	1/4" 3/8" only A AC ACE BD	2 4 6 8	70 120 172 222	0 50,8 101,6 152,4	35	25,4	44,5
1"	1/4" 3/8" only A AC ACE BD	2 4 6 8	95 159 222 286	0 63,5 127 190,5	38,1	31,75	50,8
1 1/4"	1/4" 3/8" 1/2"	2 4 6 8	152 254 355 457	0 101,6 203,2 304,8	47,6	50,8	63,5
1 1/2"	1/4" 3/8" 1/2"	2 4 6 8	152 254 355 457	0 101,6 203,2 304,8	57,2	50,8	76,2
2"	3/8" 1/2" 3/4"	2 4 6 8	203 305 432 559	0 127 254 381	72,4	63,50	89,0

FLEXQ



LINKING PRECISION WITH PERFORMANCE

QUICK COUPLING SOLUTIONS

baha-Tools GmbH

Holzheimer Straße 8 - 73037 Göppingen - Germany
Telefon: +49 7161 401617-0

E-Mail: info@flexq-connectors.com - www.flexq-connectors.com