

SERIE PBP

PNEUMATICS

PROFILE ISO 6150-C with Push button

Options

- Colour coding
- Raised push button
- Fixing ring

R / B
ED
BO

Applications

- Pneumatics
- Gases



Materials

Body Socket	Stainless st. AISI 303
Socket backpart	Steel zinc plated
Plug	Stainless steel
Button	AISI 420 chrome pl.
Valve	Brass
Spring	Stainless steel
Seals	NBR (N)



Temperature range

Nitril (NBR)	N	- 15 °C +100 °C
Fluorcarbon (FPM)	V	-20 °C +200 °C

Always make sure that no medium flowing before disconnecting

PBP 03 PBP 06 PBP 08 PBP 11 PBP 13 PBP 16 PBP 19



Flow Size

3 6 8 11 13 16 19




Pressure

50 50 50 50 50 50 50


FLEXQ


Series PBP - Flow Rate vs Pressure Drop

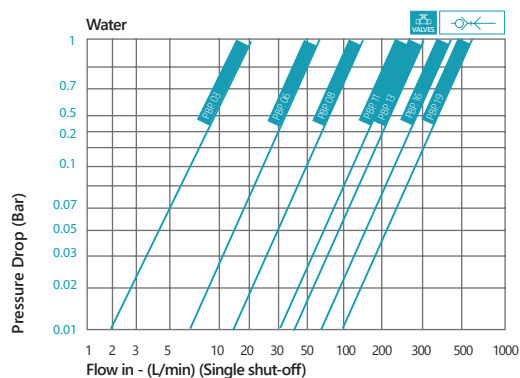


		✓
		✓
		✗
		✓
		✗
		✓

Size				Ød1	Ød	L	L1	HEX	Standard hose tail socket
3	PBP 03 FHB 04	PBP 03 FHO 04	PBP 03 FHF 04	4 mm	16	52	18	14	
	PBP 03 FHB 06	PBP 03 FHO 06	PBP 03 FHF 06	6 mm	16	52	18	14	
6	PBP 06 FHB 06	PBP 06 FHO 06	PBP 06 FHF 06	6 mm	26	69	23	22	
	PBP 06 FHB 08	PBP 06 FHO 08	PBP 06 FHF 08	8 mm	26	69	23	22	
	PBP 06 FHB 10	PBP 06 FHO 10	PBP 06 FHF 10	10 mm	26	69	23	22	
	PBP 06 FHB 13	PBP 06 FHO 13	PBP 06 FHF 13	13mm	26	73	25	22	
8	PBP 08 FHB 06	PBP 08 FHO 06	PBP 08 FHF 06	6 mm	32	81	23	27	
	PBP 08 FHB 08	PBP 08 FHO 08	PBP 08 FHF 08	8 mm	32	81	23	27	
	PBP 08 FHB 10	PBP 08 FHO 10	PBP 08 FHF 10	10 mm	32	81	23	27	
	PBP 08 FHB 13	PBP 08 FHO 13	PBP 08 FHF 13	13mm	32	84	26	27	
11	PBP 11 FHB 08	PBP 11 FHO 08	PBP 11 FHF 08	8 mm	38	92	23	32	
	PBP 11 FHB 10	PBP 11 FHO 10	PBP 11 FHF 10	10 mm	38	92	23	32	
	PBP 11 FHB 13	PBP 11 FHO 13	PBP 11 FHF 13	13 mm	38	94	26	32	
	PBP 11 FHB 16	PBP 11 FHO 16	PBP 11 FHF 16	16mm	38	94	26	32	
13	PBP 13 FHB 10	PBP 13 FHO 10	PBP 13 FHF 10	10 mm	38	92	23	32	
	PBP 13 FHB 13	PBP 13 FHO 13	PBP 13 FHF 13	13 mm	38	94	26	32	
	PBP 13 FHB 16	PBP 13 FHO 16	PBP 13 FHF 16	16 mm	38	94	26	32	
	PBP 13 FHB 19	PBP 13 FHO 19	PBP 13 FHF 19	19 mm	38	99	33	32	
16	PBP 16 FHB 10	PBP 16 FHO 10	PBP 16 FHF 10	10 mm	44	101	23	38	
	PBP 16 FHB 13	PBP 16 FHO 13	PBP 16 FHF 13	13 mm	44	104	26	38	
	PBP 16 FHB 16	PBP 16 FHO 16	PBP 16 FHF 16	16 mm	44	104	26	38	
	PBP 16 FHB 19	PBP 16 FHO 19	PBP 16 FHF 19	19 mm	44	101	33	38	
19	PBP 19 FHB 19	PBP 19 FHO 19	PBP 19 FHF 19	19 mm	55	125	37	46	
	PBP 19 FHB 25	PBP 19 FHO 25	PBP 19 FHF 25	25 mm	55	140	50	46	

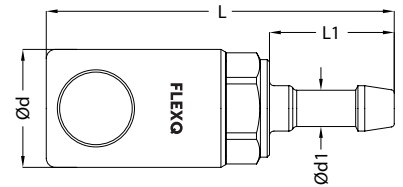


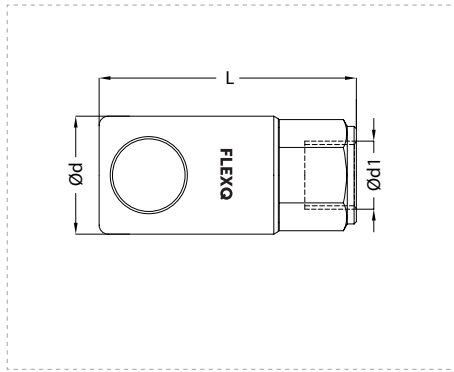Female thread socket		 Size				Ød1	Ød	L	HEX
	3	PBP 03 FFB 18	PBP 03 FFO 18	PBP 03 FFF 18	BSP 1/8"	16	43	14	
		PBP 03 FNB 18	PBP 03 FNO 18	PBP 03 FNF 18	NPT 1/8"	16	43	14	
	6	PBP 06 FFB 18	PBP 06 FFO 18	PBP 06 FFF 18	BSP 1/8"	26	53	22	
		PBP 06 FFB 14	PBP 06 FFO 14	PBP 06 FFF 14	BSP 1/4"	26	53	22	
		PBP 06 FFB 38	PBP 06 FFO 38	PBP 06 FFF 38	BSP 3/8"	26	57	22	
		PBP 06 FFB 12	PBP 06 FFO 12	PBP 06 FFF 12	BSP 1/2"	26	61	24	
		PBP 06 FNB 18	PBP 06 FNO 18	PBP 06 FNF 18	NPT 1/8"	26	53	22	
		PBP 06 FNB 14	PBP 06 FNO 14	PBP 06 FNF 14	NPT 1/4"	26	53	22	
		PBP 06 FNB 38	PBP 06 FNO 38	PBP 06 FNF 38	NPT 3/8"	26	57	22	
		PBP 06 FNB 12	PBP 06 FNO 12	PBP 06 FNF 12	NPT 1/2"	26	61	24	
	8	PBP 08 FFB 14	PBP 08 FFO 14	PBP 08 FFF 14	BSP 1/4"	32	66	27	
		PBP 08 FFB 38	PBP 08 FFO 38	PBP 08 FFF 38	BSP 3/8"	32	66	27	
		PBP 08 FFB 12	PBP 08 FFO 12	PBP 08 FFF 12	BSP 1/2"	32	74	27	
		PBP 08 FNB 14	PBP 08 FNO 14	PBP 08 FNF 14	NPT 1/4"	32	66	27	
		PBP 08 FNB 38	PBP 08 FNO 38	PBP 08 FNF 38	NPT 3/8"	32	66	27	
		PBP 08 FNB 12	PBP 08 FNO 12	PBP 08 FNF 12	NPT 1/2"	32	74	27	
	11	PBP 11 FFB 38	PBP 11 FFO 38	PBP 11 FFF 38	BSP 3/8"	38	76	32	
		PBP 11 FFB 12	PBP 11 FFO 12	PBP 11 FFF 12	BSP 1/2"	38	78	32	
		PBP 11 FFB 34	PBP 11 FFO 34	PBP 11 FFF 34	BSP 3/4"	38	85	34	
		PBP 11 FNB 38	PBP 11 FNO 38	PBP 11 FNF 38	NPT 3/8"	38	76	32	
		PBP 11 FNB 12	PBP 11 FNO 12	PBP 11 FNF 12	NPT 1/2"	38	78	32	
		PBP 11 FNB 34	PBP 11 FNO 34	PBP 11 FNF 34	NPT 3/4"	38	85	34	
	13	PBP 13 FFB 38	PBP 13 FFO 38	PBP 13 FFF 38	BSP 3/8"	38	76	32	
		PBP 13 FFB 12	PBP 13 FFO 12	PBP 13 FFF 12	BSP 1/2"	38	78	32	
		PBP 13 FFB 34	PBP 13 FFO 34	PBP 13 FFF 34	BSP 3/4"	38	85	34	
		PBP 13 FNB 38	PBP 13 FNO 38	PBP 13 FNF 38	NPT 3/8"	38	76	32	
		PBP 13 FNB 12	PBP 13 FNO 12	PBP 13 FNF 12	NPT 1/2"	38	78	32	
		PBP 13 FNB 34	PBP 13 FNO 34	PBP 13 FNF 34	NPT 3/4"	38	85	34	
	16	PBP 16 FFB 12	PBP 16 FFO 12	PBP 16 FFF 12	BSP 1/2"	44	93	32	
		PBP 16 FFB 34	PBP 16 FFO 34	PBP 16 FFF 34	BSP 3/4"	44	98	32	
		PBP 16 FNB 12	PBP 16 FNO 12	PBP 16 FNF 12	NPT 1/2"	44	93	34	
		PBP 16 FNB 34	PBP 16 FNO 34	PBP 16 FNF 34	NPT 3/4"	44	98	32	
	19	PBP 19 FFB 34	PBP 19 FFO 34	PBP 19 FFF 34	BSP 3/4"	55	115	46	
		PBP 19 FFB 10	PBP 19 FFO 10	PBP 19 FFF 10	BSP 1"	55	115	46	
		PBP 19 FNB 34	PBP 19 FNO 34	PBP 19 FNF 34	NPT 3/4"	55	115	46	
		PBP 19 FNB 10	PBP 19 FNO 10	PBP 19 FNF 10	NPT 1"	55	115	46	

Size				Ød1	Ød	L	HEX	Male thread socket
3	PBP 03 FMB 18	PBP 03 FMO 18	PBP 03 FMF 18	BSP 1/8"	16	43	14	
	PBP 03 FMB 14	PBP 03 FMO 14	PBP 03 FMF 18	BSP 1/4"	16	45	14	
	PBP 03 FTB 18	PBP 03 FTO 18	PBP 03 FTF 18	NPT 1/8"	16	44	14	
	PBP 03 FTB 14	PBP 03 FTO 14	PBP 03 FTF 18	NPT 1/4"	15	45	14	
6	PBP 06 FMB 18	PBP 06 FMO 18	PBP 06 FMF 18	BSP 1/8"	26	55	22	
	PBP 06 FMB 14	PBP 06 FMO 14	PBP 06 FMF 14	BSP 1/4"	26	61	22	
	PBP 06 FMB 38	PBP 06 FMO 38	PBP 06 FMF 38	BSP 3/8"	26	61	22	
	PBP 06 FMB 12	PBP 06 FMO 12	PBP 06 FMF 12	BSP 1/2"	26	65	24	
	PBP 06 FTB 18	PBP 06 FTO 18	PBP 06 FTF 18	NPT 1/8"	26	55	22	
	PBP 06 FTB 14	PBP 06 FTO 14	PBP 06 FTF 14	NPT 1/4"	26	61	22	
	PBP 06 FTB 38	PBP 06 FTO 38	PBP 06 FTF 38	NPT 3/8"	26	61	22	
	PBP 06 FTB 12	PBP 06 FTO 12	PBP 06 FTF 12	NPT 1/2"	26	66	24	
8	PBP 08 FMB 14	PBP 08 FMO 14	PBP 08 FMF 14	BSP 1/4"	32	72	27	
	PBP 08 FMB 38	PBP 08 FMO 38	PBP 08 FMF 38	BSP 3/8"	32	72	27	
	PBP 08 FMB 12	PBP 08 FMO 12	PBP 08 FMF 12	BSP 1/2"	32	76	27	
	PBP 08 FTB 14	PBP 08 FTO 14	PBP 08 FTF 14	NPT 1/4"	32	72	27	
	PBP 08 FTB 38	PBP 08 FTO 38	PBP 08 FTF 38	NPT 3/8"	32	72	27	
	PBP 08 FTB 12	PBP 08 FTO 12	PBP 08 FTF 12	NPT 1/2"	32	76	27	
11	PBP 11 FMB 38	PBP 11 FMO 38	PBP 11 FMF 38	BSP 3/8"	38	84	32	
	PBP 11 FMB 12	PBP 11 FMO 12	PBP 11 FMF 12	BSP 1/2"	38	88	32	
	PBP 11 FMB 34	PBP 11 FMO 34	PBP 11 FMF 34	BSP 3/4"	38	91	34	
	PBP 11 FTB 38	PBP 11 FTO 38	PBP 11 FTF 38	NPT 3/8"	38	84	32	
	PBP 11 FTB 12	PBP 11 FTO 12	PBP 11 FTF 12	NPT 1/2"	38	88	32	
	PBP 11 FTB 34	PBP 11 FTO 34	PBP 11 FTF 34	NPT 3/4"	38	91	34	
13	PBP 13 FMB 38	PBP 13 FMO 38	PBP 13 FMF 38	BSP 3/8"	38	84	32	
	PBP 13 FMB 12	PBP 13 FMO 12	PBP 13 FMF 12	BSP 1/2"	38	88	32	
	PBP 13 FMB 34	PBP 13 FMO 34	PBP 13 FMF 34	BSP 3/4"	38	91	34	
	PBP 13 FTB 38	PBP 13 FTO 38	PBP 13 FTF 38	NPT 3/8"	38	84	32	
	PBP 13 FTB 12	PBP 13 FTO 12	PBP 13 FTF 12	NPT 1/2"	38	88	32	
	PBP 13 FTB 34	PBP 13 FTO 34	PBP 13 FTF 34	NPT 3/4"	38	91	34	
16	PBP 16 FMB 12	PBP 16 FMO 12	PBP 16 FMF 12	BSP 1/2"	44	99	38	
	PBP 16 FMB 34	PBP 16 FMO 34	PBP 16 FMF 34	BSP 3/4"	44	101	38	
	PBP 16 FTB 12	PBP 16 FTO 12	PBP 16 FTF 12	NPT 1/2"	44	99	38	
	PBP 16 FTB 34	PBP 16 FTO 34	PBP 16 FTF 34	NPT 3/4"	44	101	38	
19	PBP 19 FMB 34	PBP 19 FMO 34	PBP 19 FMF 34	BSP 3/4"	55	125	46	
	PBP 19 FMB 10	PBP 19 FMO 10	PBP 19 FMF 10	BSP 1"	55	127	46	
	PBP 19 FTB 34	PBP 19 FTO 34	PBP 19 FTF 34	NPT 3/4"	55	125	46	
	PBP 19 FTB 10	PBP 19 FTO 10	PBP 19 FTF 10	NPT 1"	55	127	46	

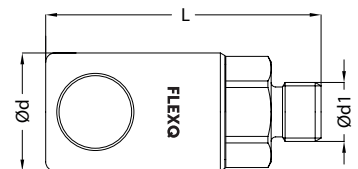


Female thread plug




Size		Ød	L	HEX
3	PBP 03 MFB 18	BSP 1/8"	52	14
	PBP 03 MNB 18	NPT 1/8"	52	14
6	PBP 06 MFB 18	BSP 1/8"	66	17
	PBP 06 MFB 14	BSP 1/4"	73	17
	PBP 06 MFB 38	BSP 3/8"	73	22
	PBP 06 MNB 18	NPT 1/8"	66	17
	PBP 06 MNB 14	NPT 1/4"	73	17
	PBP 06 MNB 38	NPT 3/8"	73	22
8	PBP 08 MFB 14	BSP 1/4"	81	24
	PBP 08 MFB 38	BSP 3/8"	81	24
	PBP 08 MFB 12	BSP 1/2"	83	24
	PBP 08 MNB 14	NPT 1/4"	81	24
	PBP 08 MNB 38	NPT 3/8"	81	24
	PBP 08 MNB 12	NPT 1/2"	83	24
11	PBP 11 MFB 38	BSP 3/8"	91	30
	PBP 11 MFB 12	BSP 1/2"	94	30
	PBP 11 MFB 34	BSP 3/4"	98	34
	PBP 11 MNB 38	NPT 3/8"	91	30
	PBP 11 MNB 12	NPT 1/2"	94	30
	PBP 11 MNB 34	NPT 3/4"	98	34
13	PBP 13 MFB 38	BSP 3/8"	91	30
	PBP 13 MFB 12	BSP 1/2"	94	30
	PBP 13 MFB 34	BSP 3/4"	98	34
	PBP 13 MNB 38	NPT 3/8"	91	30
	PBP 13 MNB 12	NPT 1/2"	94	30
	PBP 13 MNB 34	NPT 3/4"	98	34
16	PBP 16 MFB 12	BSP 1/2"	108	36
	PBP 16 MFB 34	BSP 3/4"	111	36
	PBP 16 MNB 12	NPT 1/2"	108	36
	PBP 16 MNB 34	NPT 3/4"	111	36
19	PBP 19 MFB 34	BSP 3/4"	133	41
	PBP 19 MFB 10	BSP 1"	139	41
	PBP 19 MNB 34	NPT 3/4"	133	41
	PBP 19 MNB 10	NPT 1"	139	41

Female thread plug




Size		Ød	L	HEX
3	PBP 03 MFF 18	BSP 1/8"	43	14
	PBP 03 MNF 18	NPT 1/8"	43	14
6	PBP 06 MFF 18	BSP 1/8"	42	14
	PBP 06 MFF 14	BSP 1/4"	47	17
	PBP 06 MFF 38	BSP 3/8"	50	22
	PBP 06 MFF 12	BSP 1/2"	53	27
	PBP 06 MNF 18	NPT 1/8"	42	14
	PBP 06 MNF 14	NPT 1/4"	47	17
	PBP 06 MNF 38	NPT 3/8"	50	22
	PBP 06 MNF 12	NPT 1/2"	53	27
8	PBP 08 MFF 14	BSP 1/4"	56	24
	PBP 08 MFF 38	BSP 3/8"	58	24
	PBP 08 MFF 12	BSP 1/2"	59	24
	PBP 08 MNF 14	NPT 1/4"	56	24
	PBP 08 MNF 38	NPT 3/8"	58	24
	PBP 08 MNF 12	NPT 1/2"	60	24
11	PBP 11 MFF 38	BSP 3/8"	62	22
	PBP 11 MFF 12	BSP 1/2"	66	27
	PBP 11 MFF 34	BSP 3/4"	69	32
	PBP 11 MNF 38	NPT 3/8"	62	22
	PBP 11 MNF 12	NPT 1/2"	66	27
	PBP 11 MNF 34	NPT 3/4"	69	32
13	PBP 13 MFF 38	BSP 3/8"	62	22
	PBP 13 MFF 12	BSP 1/2"	66	27
	PBP 13 MFF 34	BSP 3/4"	69	32
	PBP 13 MNF 38	NPT 3/8"	62	22
	PBP 13 MNF 12	NPT 1/2"	66	27
	PBP 13 MNF 34	NPT 3/4"	69	32
16	PBP 16 MFF 12	BSP 1/2"	69	27
	PBP 16 MFF 34	BSP 3/4"	72	32
	PBP 16 MNF 12	NPT 1/2"	69	27
	PBP 16 MNF 34	NPT 3/4"	72	32
19	PBP 19 MFF 34	BSP 3/4"	89	36
	PBP 19 MFF 10	BSP 1"	94	41
	PBP 19 MNF 34	NPT 3/4"	89	36
	PBP 19 MNF 10	NPT 1"	94	41

Male thread plug




Size		Ød	L	HEX
3	PBP 03 MMB 18	BSP 1/8"	51	14
	PBP 03 MMB 14	BSP 1/4"	54	14
	PBP 03 MTB 18	NPT 1/8"	51	14
	PBP 03 MTB 14	NPT 1/4"	54	14
6	PBP 06 MMB 18	BSP 1/8"	68	14
	PBP 06 MMB 14	BSP 1/4"	70	14
	PBP 06 MMB 38	BSP 3/8"	72	19
	PBP 06 MTB 18	NPT 1/8"	68	14
	PBP 06 MTB 14	NPT 1/4"	70	14
	PBP 06 MTB 38	NPT 3/8"	73	19
8	PBP 08 MMB 14	BSP 1/4"	83	24
	PBP 08 MMB 38	BSP 3/8"	84	24
	PBP 08 MMB 12	BSP 1/2"	86	24
	PBP 08 MTB 14	NPT 1/4"	86	24
	PBP 08 MTB 38	NPT 3/8"	84	24
	PBP 08 MTB 12	NPT 1/2"	87	24
11	PBP 11 MMB 38	BSP 3/8"	95	30
	PBP 11 MMB 12	BSP 1/2"	96	30
	PBP 11 MMB 34	BSP 3/4"	100	30
	PBP 11 MTB 38	NPT 3/8"	97	30
	PBP 11 MTB 12	NPT 1/2"	98	30
	PBP 11 MTB 34	NPT 3/4"	102	30
13	PBP 13 MMB 38	BSP 3/8"	95	30
	PBP 13 MMB 12	BSP 1/2"	96	30
	PBP 13 MMB 34	BSP 3/4"	100	34
	PBP 13 MTB 38	NPT 3/8"	97	30
	PBP 13 MTB 12	NPT 1/2"	98	30
	PBP 13 MTB 34	NPT 3/4"	102	30
16	PBP 16 MFB 12	BSP 1/2"	118	36
	PBP 16 MFB 34	BSP 3/4"	120	36
	PBP 16 MNB 12	NPT 1/2"	119	36
	PBP 16 MNB 34	NPT 3/4"	121	36
19	PBP 19 MFB 34	BSP 3/4"	135	41
	PBP 19 MFB 10	BSP 1"	139	41
	PBP 19 MNB 34	NPT 3/4"	136	41
	PBP 19 MNB 10	NPT 1"	141	41

Male thread plug




Size		Ød	L	HEX
3	PBP 03 MMF 18	BSP 1/8"	38	14
	PBP 03 MMF 14	BSP 1/4"	30	14
	PBP 03 MTF 18	NPT 1/8"	38	14
	PBP 03 MTF 14	NPT 1/4"	41	14
6	PBP 06 MMF 18	BSP 1/8"	44	14
	PBP 06 MMF 14	BSP 1/4"	48	14
	PBP 06 MMF 38	BSP 3/8"	52	19
	PBP 06 MMF 12	BSP 1/2"	55	24
	PBP 06 MTF 18	NPT 1/8"	45	14
	PBP 06 MTF 14	NPT 1/4"	47	14
	PBP 06 MTF 38	NPT 3/8"	53	19
	PBP 06 MTF 12	NPT 1/2"	54	24
8	PBP 08 MMF 14	BSP 1/4"	55	17
	PBP 08 MMF 38	BSP 3/8"	57	19
	PBP 08 MMF 12	BSP 1/2"	60	24
	PBP 08 MTF 14	NPT 1/4"	56	17
	PBP 08 MTF 38	NPT 3/8"	57	19
	PBP 08 MTF 12	NPT 1/2"	64	24
	PBP 11 MMF 38	BSP 3/8"	65	19
11	PBP 11 MMF 12	BSP 1/2"	68	24
	PBP 11 MMF 34	BSP 3/4"	70	30
	PBP 11 MTF 38	NPT 3/8"	66	19
	PBP 11 MTF 12	NPT 1/2"	69	24
	PBP 11 MTF 34	NPT 3/4"	71	30
	PBP 13 MMF 38	BSP 3/8"	65	9
13	PBP 13 MMF 12	BSP 1/2"	68	24
	PBP 13 MMF 34	BSP 3/4"	70	30
	PBP 13 MTF 38	NPT 3/8"	66	19
	PBP 13 MTF 12	NPT 1/2"	69	24
	PBP 13 MTF 34	NPT 3/4"	71	30
	PBP 16 MMF 12	BSP 1/2"	73	24
16	PBP 16 MMF 34	BSP 3/4"	76	30
	PBP 16 MMF 12	NPT 1/2"	74	24
	PBP 16 MMF 34	NPT 3/4"	77	30
	PBP 19 MMF 34	BSP 3/4"	95	36
19	PBP 19 MMF 10	BSP 1"	100	36
	PBP 19 MTF 34	NPT 3/4"	96	36
	PBP 19 MTF 10	NPT 1"	105	36

Standard hose tail plug

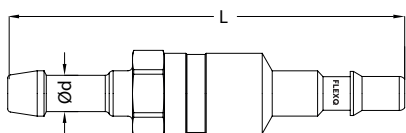

Size		Ød	L	HEX
3	PBP 03 MHB 04	4 mm	65	14
	PBP 03 MHB 06	6 mm	65	14
6	PBP 06 MHB 04	4 mm	87	17
	PBP 06 MHB 06	6 mm	87	17
	PBP 06 MHB 08	8 mm	87	17
	PBP 06 MHB 10	10 mm	87	17
	PBP 06 MHB 13	13 mm	89	17
8	PBP 08 MHB 06	6 mm	98	24
	PBP 08 MHB 08	8 mm	98	24
	PBP 08 MHB 10	10 mm	98	24
	PBP 08 MHB 13	13 mm	100	24
	PBP 08 MHB 16	16 mm	102	24
11	PBP 11 MHB 08	8 mm	100	30
	PBP 11 MHB 10	10 mm	100	30
	PBP 11 MHB 13	13 mm	102	30
	PBP 11 MHB 16	16 mm	102	30
	PBP 11 MHB 19	19 mm	120	33
13	PBP 13 MHB 08	8 mm	100	30
	PBP 13 MHB 10	10 mm	100	30
	PBP 13 MHB 13	13 mm	102	30
	PBP 13 MHB 16	16 mm	102	30
	PBP 13 MHB 19	19 mm	120	33
16	PBP 16 MHB 10	10 mm	151	36
	PBP 16 MHB 13	13 mm	153	36
	PBP 16 MHB 16	16 mm	153	36
	PBP 16 MHB 19	19 mm	160	36
19	PBP 19 MHB 19	19 mm	190	41
	PBP 19 MHB 25	25 mm	195	41

Standard hose tail plug



Size		Ød	L
3	PBP 03 MHF 04	4 mm	48
	PBP 03 MHF 06	6 mm	48
6	PBP 06 MHF 04	4 mm	62
	PBP 06 MHF 06	6 mm	62
	PBP 06 MHF 08	8 mm	62
	PBP 06 MHF 10	10 mm	62
	PBP 06 MHF 13	13 mm	64
8	PBP 08 MHF 06	6 mm	66
	PBP 08 MHF 08	8 mm	66
	PBP 08 MHF 10	10 mm	66
	PBP 08 MHF 13	13 mm	66
	PBP 08 MHF 16	16 mm	70
11	PBP 11 MHF 08	8 mm	70
	PBP 11 MHF 10	10 mm	70
	PBP 11 MHF 13	13 mm	72
	PBP 11 MHF 16	16 mm	74
	PBP 11 MHF 19	19 mm	80
13	PBP 13 MHF 08	8 mm	70
	PBP 13 MHF 10	10 mm	70
	PBP 13 MHF 13	13 mm	72
	PBP 13 MHF 16	16 mm	74
	PBP 13 MHF 19	19 mm	80
16	PBP 16 MHF 10	10 mm	91
	PBP 16 MHF 13	13 mm	91
	PBP 16 MHF 16	16 mm	96
	PBP 16 MHF 19	19 mm	104
19	PBP 19 MHF 19	19 mm	150
	PBP 19 MHF 25	25 mm	152

FLEXQ

■ MONOCOUPPLINGS FOR PNEUMATICS / SERIES PBP

